

CI

CI



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number: **0 318 255 B1**

(12)

EUROPEAN PATENT SPECIFICATION

- (45) Date of publication of patent specification: **28.04.93** (51) Int. Cl.⁵: **G01N 21/03, C12Q 1/68, B01L 3/00**
- (21) Application number: **88311059.5**
- (22) Date of filing: **23.11.88**

(54) **Cuvette.**

(30) Priority: **23.11.87 US 123751**
21.11.88 US 273781

(43) Date of publication of application:
31.05.89 Bulletin 89/22

(45) Publication of the grant of the patent:
28.04.93 Bulletin 93/17

(84) Designated Contracting States:
CH DE FR GB IT LI SE

(56) References cited:

EP-A- 0 138 152	EP-A- 0 225 807
EP-A- 0 229 701	EP-A- 0 237 362
EP-A- 0 238 332	WO-A-86/07387
US-A- 3 799 742	US-A- 4 501 719
US-A- 4 595 561	

(73) Proprietor: **EASTMAN KODAK COMPANY (a New Jersey Corporation)**
343 State Street
Rochester New York 14650(US)

(72) Inventor: **Columbus, Richard Lewis c/o Eastman Kodak Company**
Patent Department 343 State Street
Rochester New York 14650(US)
Inventor: **Helper, Jeffrey Lawrence**
Patent Department 343 State Street
Rochester New York 14650(US)
Inventor: **Porte, Johannes Jacobus**
Patent Department 343 State Street
Rochester New York 14650(US)
Inventor: **Wellman, Jeffrey Allen**
Patent Department 343 State Street
Rochester New York 14650(US)

(74) Representative: **Phillips, Margaret Dawn et al**
Kodak Limited Patent Department Headstone Drive
Harrow, Middlesex HA1 4TY (GB)

EP 0 318 255 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

This invention relates to cuvettes in which reactions are undertaken in liquids confined within the cuvette, and particularly those reactions requiring carefully controlled temperatures, limited amount of sample, and a rapid rate of fluid temperature change.

Although this invention is not limited to cuvettes used for nucleic acid amplification, the background is described in the context of the latter.

Nucleic acid amplification generally proceeds via the following steps (shown in Figure 1):

1) If DNA is to be amplified, a complete DNA double helix is optionally chemically excised, using an appropriate restriction enzyme(s), to isolate the region of interest.

2) A solution of the isolated nucleic acid portion (here, DNA) and nucleotides is heated to and maintained at 92° - 95° C for a length of time, e.g., no more than about 10 minutes, to denature the two nucleic acid strands; i.e., cause them to unwind and separate and form a template.

3) The solution is then cooled through a 50° - 60° C zone to cause a primer nucleic acid strand to anneal or "attach" to each of the two template strands. To make sure this happens, the solution is held at an appropriate temperature, such as about 55° C for about 15 seconds, in an "incubation" zone.

4) The solution is then heated to and held at about 70° C, to cause an extension enzyme, preferably a thermally stable enzyme such as a polymerase isolated from *thermus aquaticus*, to extend the primer strand bound to the template strand, by using the nucleotides that are present.

5) The completed new pair of strands is heated to 92° - 95° C again, for about 10 - 15 seconds, to cause this pair to separate.

6) Steps 3) - 5) are then repeated, a number of times until the appropriate number of strands are obtained. (See, e.g., U.S. Patent 4,683,202 for further illustration.) The more repetitions, the greater the number of multiples of the nucleic acid (here, DNA) that is produced. Preferably the desired concentration of nucleic acid is reached in a minimum amount of time.

A cuvette is usually used to hold the solution while it passes through the aforementioned temperature stages. Depending upon the design given to the cuvette, it can proceed more or less rapidly through the various stages. A key aspect controlling this is the thermal transfer efficiency of the cuvette - that is, its ability to transfer heat more or less instantaneously to or from all of the liquid solution within the cuvette. The disposition and the

thermal resistance of the liquid solution itself are the major aspects affecting the thermal transfer, since portions of the liquid solution that are relatively far removed from the heat source or sink, will take longer to reach the desired temperature.

The crudest and earliest type of cuvette used in the prior art is a test tube, which has poor thermal transfer efficiency since a) the walls of the cuvette by being glass or plastic, do not transfer thermal energy well, and b) a cylinder of liquid has relatively poor thermal transfer throughout the liquid. That is, not only does the liquid have low thermal conductivity, but also a cylinder of liquid has a low surface to volume ratio, that is, about 10.6 cm⁻¹ (27 in⁻¹) for a fill of about 100 μ l.

Still another problem in DNA amplification is the manner in which the cuvette allows for ready removal of the liquid after reaction is complete. A test tube configuration readily permits such removal. However, modification of the cuvette to provide better thermal transfer efficiency tends to reduce the liquid transferability.

Recent cuvette or vessel constructions for reaction of liquid are shown in U.S. Patent Nos. 4,426,451 issued January 17, 1984 and 3,691,017 issued on September 12, 1972. In the former, little attempt is made to provide high thermal transfer efficiency, except that the liquid is distributed as a thin film that will allow rapid heating, if heat penetrates to the liquid. However, no mention is made of the cuvette being constructed of metal or any material that is highly thermally conductive. Furthermore, since the spacing between top and bottom walls is no greater than 125 microns to provide a strong capillary effect, removal of liquid from such cuvette will be difficult. At best, not all the liquid will be removed because of the strong capillary attraction.

In the case of cuvettes of U.S. Patent No. 3,691,017, more features suitable for DNA amplification are provided. For example, by having a spacing of about 5 mm between major surfaces, it is more readily possible to remove all of the liquid, there being less capillary attraction left at such a gross spacing. In addition, a metal layer is provided on the outside of the cuvette to provide contact with a heating device. However, this cuvette does not have a low thermal time constant for several reasons. One reason is that to ensure transparency, the major surfaces are not constructed of metal, but rather of an insulator. As a result, a long thermal transfer path is needed by extending the metal layer around the edge of the device and into only a portion of the volume of the cuvette. This thermal path length is well in excess of 0.5 mm since it is much more than the thickness of the wall providing either major surface. Indeed, only a portion of the volume of the cuvette is in direct

contact with the metallic thermal-energy transfer element.

Secondly, and more importantly, there is a high thermal resistance in the cuvette of US Patent No. 3691017 because of the low fluid surface/volume ratio provided by cavity geometry, discussed hereinafter in detail.

Thus, prior to this invention there has been an unsolved problem of providing a cuvette with rapid thermal transfer characteristics, as measured by its thermal time constant when filled with the liquid of choice, such as would be suited for replication of portions of DNA.

In accord with one aspect of the invention, the above problem is addressed by a thermal cycling cuvette for controlled reaction of components of a liquid involving cycling through a temperature range of at least 35°C, said cuvette having at least one liquid-confining chamber defined by two spaced-apart opposing walls each providing a major surface of contact, side walls connecting said two opposing walls with a spacing between said opposing walls of no less than 0.5 mm, and means permitting the introduction of liquid into, and the removal of such liquid from, said chamber;

characterised in that said opposing walls and said side walls are dimensioned to provide a predetermined surface-to-volume ratio of said chamber, at least one of said opposing walls being provided with a predetermined thermal path length and thermal resistance such that said ratio, path length and thermal resistance are effective to provide, for pure water contained within said chamber in contact with said opposing walls, a thermal time constant for such water that is no greater than 10 seconds, for a liquid volume of no more than 200 μ l.

Advantageously, said predetermined surface-to-volume ratio is between 25.6 cm^{-1} (65 in^{-1}) and 51 cm^{-1} (130 in^{-1}) for a fill volume of between 100 and 200 μ l.

It is preferred that said thermal path length is no more than 0.3 mm and said thermal resistance is no more than 0.01°C/watt.

Preferably, said permitting means includes a liquid access aperture, an air vent, and a movable valve for selectively sealing off fluid flow between a) each of said access aperture, and b) said chamber.

A portion of said valve may be rotatably mounted in the cuvette, and means for rotating said valve portion about an axis may also be provided, said access aperture and said air vent being rotationally oriented about said axis to cooperate with rotation of said valve portion to open and close said access aperture and said air vent.

Alternatively, said valve may be translatablely mounted within the cuvette, and biasing means

may be provided for biasing said valve to a closed position wherein said access aperture and said vent are fluidly disconnected from said chamber.

In one embodiment of the present invention, the cuvette further includes a second liquid-confining chamber defined by two spaced-apart opposing walls, side walls connecting said second chamber two opposing walls, means permitting the introduction of liquid into said second chamber from said first chamber, and means permitting the removal of such liquid out of said second chamber; said chambers further providing a major plane of liquid containment, the major plane of one of said chambers being disposed above the major plane of the other of said chambers.

Thus, it is an advantageous feature of the invention that rapid thermal energy transfer occurs in and out of the cuvette and its liquid contents, permitting the liquid to undergo multiple temperature changes as needed for the desired reaction. As a result, a required number of repetitive cycles can be achieved in less time than has been heretofore possible.

It is a related advantageous feature of the invention that a cuvette is provided which allows rapid thermal processing of DNA strands through a multizoned cycle requiring many heat-and-cool repetitions.

It is still another related advantageous feature of the invention that such a cuvette and its liquid has a reduced thermal time constant, requiring very little delay just to heat up or cool down the liquid.

It is another advantageous feature of the invention that such a cuvette also permits relatively easy withdrawal of the complete liquid contents, once the reactions are complete.

Another advantageous feature of the invention is the provision of such a cuvette in which the contents can be readily sealed from exposure to the atmosphere.

Still another advantageous feature of the invention is the provision of such a cuvette with two chambers and with a minimum of length and width.

The present invention will now be described by way of example with reference to the accompanying drawings, in which:

Figure 1 is a graph plotting typical temperature changes for a cuvette in which DNA replication is occurring;

Figure 2 is an isometric view of a cuvette prepared in accordance with the invention;

Figure 3 is a plan view of the cuvette of Figure 2;

Figure 4 is a section view taken generally along the line IV-IV of Figure 3;

Figure 5 is an enlarged, sectioned fragment taken from the encircled portion of the cuvette,

labeled "V", in Figure 4;

Figure 6 is a plot of an actual time-temperature response of such a cuvette, to obtain the thermal time constant thereof;

Figure 7 is a plot of the heating response curve that such a cuvette will have, in light of the data of Figure 6;

Figures 8 and 9 are sectional views similar to that of Figure 4, but illustrating two different embodiments;

Figure 10 is a fragmentary sectional view similar to Figure 4, illustrating the cooperation of both a pipette and a seal, with the cuvette.

Figure 11 is a fragmentary plan view of an alternate embodiment, particularly of the valving mechanism;

Figure 12 is a section view taken generally along the line XII-XII of Figure 11;

Figure 13 is a fragmentary plan view similar to that of Figure 11, but with the valve rotated about 45°;

Figure 14 is a section view similar to Figure 12, but illustrating the valve rotated as noted for Figure 13, and taken along the line XIV-XIV of Figure 13;

Figure 15 is a section view similar to that of Figure 12, but of still another embodiment;

Figure 16 is a plan view of another embodiment of the invention partially broken away;

Figure 17 is a section view taken generally along the line XVII-XVII of Figure 16;

Figure 18 is a section view similar to that of Figure 17, but illustrating yet another embodiment;

Figure 19 is a schematic illustration of an incubating apparatus that is useful in cycling the cuvette through its DNA processing temperatures;

Figure 20 is a section view similar to Figure 17, of still another embodiment; and

Figure 21 is a section view taken generally along the line of XXI - XXI of Figure 20.

The invention is described hereinafter preferably for temperature cycling over a range of at least 35°C, as is particularly useful in replicating DNA strands. In addition, it is also useful for any kind of reaction of liquid components and reagents that requires repetitive heating and cooling of the cuvette within which the reaction is conducted.

Orientations such as "up", "down", "above" and "below" are used with respect to the cuvette as it is preferably used.

Turning first to Figures 2-4, a cuvette 30 constructed in accord with the invention comprises a liquid-confining chamber 32 defined by two opposing walls 34 & 36, Figure 4, spaced apart a distance t_1 . Such spacing is achieved by side walls 38 and 40, Figure 3, that join at opposite ends 42 and

44 of chamber 32. Most preferably, the shape of side walls 38 and 40 is one of a gradual concavity, so that they diverge at end 42 at an angle α of about 90°, and at a point halfway between ends 42 and 44, start to reconverge again at an angle of about 90°. Distance t_1 , Figure 4, is selected such that such distance, when considered in light of the shape of sidewalls 38 and 40, minimizes the quantity of liquid that is retained in the cuvette upon removal of liquid. That is, it is well-known that capillary spacings resist liquid removal. Therefore, the thickness of the liquid between closely-spaced walls 34 and 36 is preferably a non-capillary spacing, namely a spacing ≥ 0.5 mm and most preferably, 0.5 to 2.5 mm. More precisely, given a particular shape to the liquid container, the ability of the container to empty against such adverse factors as capillary attraction, can be expressed as a capillary number N_{ca} . The equation is $N_{ca} = \mu \cdot V / \gamma$. In this equation, μ is viscosity, and for water solutions, this is about 0.01 mPa.s (0.01 centipoise). γ is surface tension, which for water solutions is about 0.07 N/m (70 dynes/cm). V is velocity in cm/sec, which is determined by the total volume to be emptied, divided by the flow-through area of the exit, and divided by the acceptable time of emptying. Therefore, the velocity factor requires detailed consideration.

The volume to be emptied varies from 200 to 100 μ l. The acceptable times are from 1 to 10 secs. Thus, V ranges between

$$\frac{200}{A \cdot 1}$$

as a maximum and

$$\frac{100}{A \cdot 10}$$

as a minimum. For purposes of the invention, A is assumed to be about $5.2 \times 10^{-3} \text{ cm}^2$, the flow-through area of exit 60. Thus, V ranges between about 1.9 cm/sec and about 38.5 cm/sec. In turn, then, the capillary number for this cuvette is between about 0.0003 and about 0.006. However, this must be coupled with a non-capillary spacing, since only that spacing allows such a rate of emptying to occur.

Walls 34 and 36 provide the major surfaces in contact with the liquid. As such, their surface area is selected such that, when considered in light of the thickness of spacing t_1 , the surface-to-volume ratio for chamber 32 is optimized for a high rate of thermal energy transfer. A highly preferred example is the exposed surface area of 2.4 cm^2 (0.37 in^2) for each of walls 34 and 36, with the surface

from the side walls providing a contact area of about 0.36 cm². Most preferably, therefore, the surface-to-volume ratio is between about 25.6 cm⁻¹ (65 in⁻¹) and about 51 cm⁻¹ (130 in⁻¹) for a fill volume of between 200 and 100 µl, respectively.

Such a large fluid surface-to-volume ratio provides an advantage apart from a rapid thermal energy transfer. It also means that, for a given volume, a much larger surface area is provided for coating reagents. This is particularly important for reagents that have to be coated in separate locations on the surface to prevent premature mixing, that is, mixing prior to injection of liquid within the chamber. Also, a more effective dissolution occurs for those reagents when liquid is introduced.

Optionally, therefore, one or more reagent layers 50 can be applied to the interior surface of wall 36, Figure 4, in a form that will allow the one or more layers to enter into a reaction with liquid sample inserted into chamber 32. Thus "a reagent" is a substance that will interact physically or chemically with the liquid sample. Such reagent layer can be applied in conventional ways, such as by spraying and drying. Such reagents can include a polymerase enzyme, salts, buffers and stabilizers. The coated layer may also include primer-pairs and dinucleotides necessary for replication.

A liquid access aperture 60 is formed in wall 36 adjacent end 42. The aperture has an upper portion 62 and a lower portion 64 that connects the upper portion with chamber 32. Preferably at least portion 62 is conical in shape, the slope of which allows a large number of different conical pipette designs P, Figure 2, to mate therewith.

At opposite end 44, an air vent 70 is provided, in a manner similar to that described in U.S. Patent No. 4,426,451. Most preferably, air vent 70 extends into a passageway 72, Figure 3, that is routed back to a point adjacent end 42, where it terminates in opening 74 adjacent access aperture 60.

To allow a single closure device to seal both the access aperture 60 and opening 74 of the air vent, both of these are surrounded by a raised, cylindrical boss 80. Any conventional closure mechanism is useful with boss 80, for example, a stopper 82, Figure 10. Such stopper can have external threads 84 for engaging mating internal threads, not shown, on the boss, or it can be constructed for a force fit within the boss 80.

Most preferably, except for wall 34 described below, the walls of the device are formed from less wettable materials, such as polycarbonate plastics materials.

In accord with one aspect of the invention, the wall 34 opposite to wall 36 is constructed with a predetermined thermal path length and thermal resistance that will provide a high rate of thermal energy transfer. Most preferably, such path length

(t_2 in Figure 5) is no greater than about 0.3 mm, and the thermal resistance is no greater than about 0.1 °C/watt. These properties are readily achieved by constructing wall 34 out of a metal such as aluminum that is about 0.15 mm thick. Such aluminum has a thermal resistance R, calculated as thickness $\times 1/(\text{thermal conductivity } K \times \text{surface area } A)$, which is about 0.003 °C/watt. (These values can be contrasted for ordinary glass of the same thickness, which has a thermal resistance of about 0.24 °C/watt.)

Wall 34 can be secured to sidewalls 38 and 40 by any suitable means. One such means is a layer 90, Figure 5, of a primer, which comprises for example a conventional high temperature acrylic adhesive, followed by layer 92 of conventional polyester adhesive. In some instances, layers 90 and 92 need not extend over the surface area of wall 34, as such would increase the thermal resistance of wall 34, and possibly interfere with reactions described within chamber 32. On the other hand, it will be apparent that some reactions can equally be adversely affected by metal ions present and for these reactions, the adhesive coats the entire surface area of wall 34.

A cuvette constructed as described above for Figures 2-4, has been found to produce a thermal time constant τ for its contained liquid that is no greater than about 10 seconds. Most preferred are those in which τ is of the order of 3-8 seconds. That is, Figure 6, when such a cuvette, filled with water, is heated along the exterior of wall 34, and its temperature is measured at point Y, Figure 4, a thermal response curve is generated from 28 °C to a final temperature of 103.9 °C. The time it takes for the liquid therein to reach a temperature of 76 °C (the initial temperature of 28 °C plus 63% of the difference (103.9 - 28)) is the approximate value of τ . This derives (approximately) from the well-known thermal response equation:

$$1) \quad \text{Temperature } T(t) = \text{Final Temperature} + (\text{Initial Temperature} - \text{Final Temperature}) \cdot e^{-t/\tau}$$

Thus, if the time interval t in question equals τ , then $e^{-t/\tau} = e^{-1} \approx 0.37$. In such a case, $T(t)$ (at $t = \tau$) is the temperature which is equal to the initial temperature, plus 63% of (Final Temperature - Initial Temperature). (The step-wise shape of the data in Figure 6 is an artifact of the recorder.)

Therefore, τ for the liquid of that cuvette is about 3.5 seconds (assuming that the response curve of Figure 6 obeys the equation (1) above, which it does to a sufficiently close approximation).

If the adhesive of layers 90 and 92 does extend over all the surface of wall 34, then τ can be increased to as much as 7 or 8 sec.

With a value of tau equal to about 3.5 sec, the thermal response curve of the same cuvette can be predicted under the conditions it will be subjected in accordance with the protocol of Figure 1. Figure 7 is such a response curve, generally for only the last segment of Figure 1 marked "X", where the stepped portions "A" are the oven or incubator temperatures, and the curve "B" is the temperature of the liquid contents, for $\tau \approx 3$ seconds. (However, in this example, the incubation temperature was selected to be 37°C instead of 55°C .)

As a comparative example, the cuvette described in U.S. Patent No. 3,691,017 has the following properties. Its overall thickness (col. 8, lines 42-44) is 7.94 mm (5/16 in or 0.31 in). The space occupied by the liquid has a thickness of 5 mm (line 44, col. 8). The window is 12.7 mm (1/2 in) by 6.35 mm (1/4 in) (line 45), so that the volume of the liquid of a unit area of one square inch, is estimated to be about 3.23 cm^3 (0.197 in^3), and its surface area contacting the cuvette is estimated to be about 18 cm^2 (2.79 in^2). This produces at best a surface/volume ratio of only about 5.6 cm^{-1} (14.2 in^{-1}). A sphere of the same volume has a S/V ratio of 3.27 cm^{-1} (8.3 in^{-1}), indicating that the cuvette is only slightly better in its S/V ratio than the worst possible configuration (the sphere). In addition, the heating element is a foil of aluminum that has to extend into the cavity from the outside, thus producing a thermal path length well in excess of 1 mm. All of this clearly indicates that the thermal time constant tau of water in such a cuvette is substantially greater than 10 sec.

It is not necessary that the cuvette be assembled using adhesive. A non-adhesive embodiment is illustrated in Figure 8, wherein parts similar to those used in the previous embodiment bear the same reference numeral to which is appended the letter "a". Thus, cuvette 30a comprises two opposed walls 34a and 36a which, with side walls (of which only 40a is shown), define a chamber 32a. A liquid access aperture 60a and an air vent 70a are provided, also as in the previous embodiment, and wall 34a has the same properties as discussed above. However, in this embodiment there are no adhesive layers between wall 34a and side wall 40a at any point. Instead, around the entire edge of chamber 32a, there is a gasket seal 100 of an elastomer, or other suitable gasket material, between wall 34a and the side wall. In addition, bumps 110 of plastics material extend from the side walls through appropriate openings in the wall 34a. Bumps 110 are then upset by heat or pressure to rivet wall 34a in place. Optionally, gasket seals 100 can also extend around such bumps.

When the access aperture and the air vent are sealed, and the cuvette is heated, pressure builds within chamber 32 and 32a. It is preferred, there-

fore that a part of the cuvette, other than the thermally conductive wall, become deformed to accommodate the pressure increase, in order to maintain intimate contact between reaction vessel wall 34 and 34a and the incubator. Still further, deformation of some other wall reduces the strain on the seal that holds the thermally conductive wall in place. Such an embodiment is shown in Figure 9, as described and claimed in our copending European Patent Application No. 88311060.3. Parts similar to those previously described bear the same reference numeral, to which the distinguishing suffix "b" is appended.

Thus, cuvette 30b comprises opposed walls 34b and 36b defining, with side walls (only wall 40b shown), a chamber 32b having a spacing t_1 . These and the access aperture 60b and air vent 70b are constructed as in either of the previous embodiments. However, to insure that wall 34b does not deform under pressure, wall 36b is constructed to have a flexure strength that is less than that of wall 34b. Specifically, this is preferably done as follows: if wall 34b comprises aluminum that is about 0.15 mm thick, then its flexure strength K at the center of flexure is determinable, based on the following:

Deflection X is determined by the well known equation

$$(2) \quad X = \alpha Pa^2/Et^3$$

where P = total applied load, E = plate modulus of elasticity, t = plate thickness, a = the length of one side of the plate, and α is an empirical coefficient (usually equal to about 0.015).

Rearranging,

$$(3) \quad P/X = Et^3/\alpha a^2.$$

Because P/X is analogous to F/X which equals K, then

$$(4) \quad K \approx Et^3/\alpha a^2$$

This allows K to be calculated to be about $6.11 \times 10^4\text{ N/m}$ ($6.11 \times 10^5\text{ dynes/mm}$). For wall 36b to have a flexure strength less than that, it need only comprise a layer of polyethylene or polypropylene that is about 0.3 mm thick (thickness t_2 that is twice that of the aluminum wall 34b), to have a flexure strength of about $8.3 \times 10^3\text{ N/m}$ ($8.3 \times 10^5\text{ dynes/mm}$), calculated in the same manner. In such a construction, wall 36b will dome upwardly as pressure is generated within chamber 32b, leaving wall 34b lying planar against the heating element (shown in phantom as "E").

In use, any of the above-described embodiments is filled to about 90% of being full, with a liquid containing the desired sample for reaction,

for example, a solution of a DNA sequence that is to be amplified. The device is then inserted into an appropriate incubator and cycled through the necessary stages for the reaction.

In accord with another aspect of the invention, a movable valve is disposed to selectively open and close access to the chamber within the cuvette. Parts similar to those previously described bear the same reference numeral to which the distinguishing letter "c" has been appended.

Thus, in Figures 11-14, end 42c of chamber 32c has both the liquid access aperture 60c and the air vent passageway 72c located adjacent to each other, within raised boss 80c, Figure 11. Upper portion 62c is conically shaped, as in previous embodiments, to allow a mating engagement of pipette P, Figure 12.

However, in this embodiment a valve is provided, comprising a rotatable portion 120 mounted within a mating conically shaped aperture 122, Figure 12. Rotatable portion 120 has an exterior, conically shaped surface 123. The valve has an axis of rotation 124, preferably concentrically disposed within aperture 60c. A handle 126 permits manual or automated rotation of the valve. Both the access aperture 60c, as well as air vent opening 74c, are located in the movable valve portion 120, Figures 11 and 13.

To selectively connect aperture 60c and opening 74c to chamber 32c, two paths are formed in rotatable portion 120. Path 130 extends from aperture 60c to the exterior surfaces 123, Figure 12, where it is open over an angle θ of that surface, Figure 11. Path 132 extends, Figure 14, from aperture 74c to an exit 134 on surface 123. The heights of the paths 130 and 132, relative to the chamber 32c and passageway 72c, respectively, are such as to allow the paths to be fluidly connected to the chamber or passageway, when rotatable portion 120 is rotated to the position shown in Figure 13. In addition, because of the angle theta (θ) of access provided by path 130, portion 120 can be rotated also to a position (not shown) wherein only the access aperture 60c is in fluid communication with chamber 32c, if desired.

A tail portion 140 holds rotatable portion 120 vertically in place, and rides in a slot 144, Figure 12.

The access and air vent valve need not be rotatable. Translatable valves are also useful. Parts similar to those previously described bear the same reference numeral to which the distinguishing suffix "d" is appended.

Thus, in Figure 15, valve portion 120d is disposed at end 42d so as to incorporate both the access aperture 60d and air vent opening 74d. However, unlike the previous embodiment, portion 120d is vertically, translatably mounted, with tail

portion 140d riding vertically in a slot 144d that permits no rotation. A spring 150 biases portion 120d so that, normally, it is raised to misalign paths 130d and 132d with respect to chamber 32d and vent passageway 72d, respectively, thus sealing off chamber 32d from the outside environment. To access the chamber, the user need only press down on portion 120d, such as by engaging access aperture 60d with a pipette P, and push against spring 150.

Vent opening 74d is, in this embodiment, a groove formed in exterior surface 123d, which allows venting of passageway 72d when portion 120d is pushed down a distance sufficient to fluidly connect chamber 32d also with aperture 60d.

In certain reactions, it is desirable that the liquid be moved to a second chamber, after an appropriate residence time in the first chamber. For example, DNA probe assays require a single, additional, new thermal cycle with which to bond DNA probes to the amplified target sequence. Subsequent to the DNA amplification temperature cycling discussed above, the DNA-bearing broth is brought into contact with DNA probes specific to the amplified target sequence. Such probes can be coated onto the walls of a reaction vessel, and more specifically, on the walls of a second, DNA probe bearing chamber, as shown in Figures 16-17. Parts similar to those previously described, bear the same reference numeral to which the distinguishing suffix "e" is appended.

Thus, cuvette 30e comprises chamber 32e disposed between two opposing walls 34e and 36e, Figure 17, having major surfaces, and side walls 38e and 40e, Figure 16, all of which are generally similar to previous embodiments, with an access aperture 60e, air vent 70e and air vent opening 74e. However, unlike the previous embodiments, metallic wall 34e is above, rather than below, chamber 32e, Figure 17, so that heat is applied downwardly from above cuvette 30e. (A filter membrane, not shown, can be optionally positioned at 70e.)

This rearrangement of walls 34e and 36e is due to the fact that a second chamber 160 is provided, disposed underneath chamber 32e. That is, each of the two chambers provides a major plane of liquid containment, and preferably, has a generally planar configuration due to the opposing walls of primary surface area being also generally planar and respectively coplanar. Thus, the major containment plane of chamber 32e is disposed above the major containment plane of chamber 160.

As is apparent in Figure 17, chamber 160 has an opposing, primary surface wall that is in fact wall 36e. The opposite wall 164 is the wall that provides the thermal energy transfer, by being con-

structed substantially the same as wall 34e. Side walls 166 and 168, Figure 16, shape the chamber 160 as in the case of chamber 32e, except that chamber 160 is rotated about 45° with respect to chamber 32e, so that its air vent, described below, does not conflict with the lower portion 64e of access aperture 60e.

An air vent and passageway 170 is provided for chamber 160, Figure 16. It is constructed similar to the air vent passageway of the air vent of previous embodiments. Alternatively, not shown, air vent opening 74e can be shaped and positioned to allow direct removal of liquid from chamber 160, without requiring it to be withdrawn back through chamber 32e as shown in Figure 16.

In use, liquid in chamber 32e is forced to flow into chamber 160, as per the arrows in Figure 17, by injecting either air pressure into chamber 32e through the access aperture, or, e.g., solutions optionally containing reagents for further reaction in the cuvette, or by pulling a vacuum on chamber 160.

Alternatively, the two chambers can overlie each other with side walls that are exactly aligned, rather than offset by 45°. This embodiment is shown in Figure 18, wherein parts similar to those previously described bear the same reference numeral to which the distinguishing letter "f" is appended.

Thus, cuvette 30f comprises upper and lower chambers 32f and 160f, sharing a common wall 36f that is not a thermal transfer wall. Air vent 70f feeds liquid from chamber 32f to 160f, and walls 34f and 164f provide the necessary rapid transfer of thermal energy. Unlike the previous embodiment, however, sidewalls (40f of chamber 32f being shown) are aligned with the sidewalls of chamber 160f (wall 166f being shown). This is rendered possible by rotating boss 80f 90° so as to provide access aperture 60f that is totally within the major plane of liquid confined by chamber 32f. In such a cuvette, air vent 170f and its opening 74f are located within the major plane of liquid confined within chamber 160f.

In each of the two embodiments of Figures 16-18, the advantage achieved is that the length or width of the cuvette is not extended appreciably beyond that of the cuvette of Figure 2, as it would be if the two major planes of liquid confinement were coplanar. Only the vertical thickness is slightly increased to permit the two chambers to be vertically stacked to provide a three-dimensional flow.

Yet another useful configuration is one shown in Figures 20 and 21, in which a third liquid-confining chamber is fluidly connected to said second chamber, with a liquid-permeable membrane isolating and separating the third chamber from the second

chamber. Parts similar to those previously described bear the same reference numeral, to which the distinguishing suffix "g" is appended.

Thus, cuvette 30g comprises a first chamber 32g having opposing walls 34g and 36g (of which wall 34g is metallic), sidewalls 38g and 40g (Figure 21) and access aperture 60g. Chamber 32g leads via passageway or air vent 70g to the second chamber 160g, disposed in a major plane of configuration that is parallel to that plane of configuration occupied by chamber 32g, as in the embodiment of Figure 16. However, in this embodiment, chamber 160g is above chamber 32g, rather than below it. Chamber 160g is defined in part by opposing walls 162 and 136, with wall 136 being preferably a buckling, preferably transparent, wall as in the case of wall 36b in the embodiment of Figure 9. Wall 136 is also preferably recessed below surface 137, so as to protect the exterior surface of wall 136 from scratching. Chamber 160g is also defined by a liquid-permeable membrane 300 having an upper surface 302 facing into chamber 160g. A lower surface 304 of the membrane faces away from chamber 160g. Useful materials for this membrane include cast, woven or electro-optically machined, microfiltration membranes. Sidewalls 166g and 168g, Figure 21, complete that chamber.

A third chamber 310 is fluidly connected to chamber 160g via membrane 300, so that chamber 310 is isolated and separated from the other two chambers by the membrane. Preferably, chamber 310 is formed within the block located between walls 36g and 162, Figure 20, so that the three chambers form a vertical stack, downwardly, of chamber 160g, 310 and 32g. Air vent passageway 170g leads from chamber 310 to air vent opening 74g located within boss 80g, as in previous embodiments. In addition, an air vent (not shown) containing a liquid-impermeable but air-permeable plug, extends from chamber 160g to boss 80g, in a location that is generally above passageway 170g.

Most preferably, a liquid-absorbing material 320 is disposed within chamber 310, to fill the chamber and preferably contact lower surface 304 of membrane 300.

A preferred use of cuvette 30g is to trap and identify a particular nucleic acid sequence, such as of DNA, amplified within the cuvette. To this end, surface 302 preferably includes means for capturing proteinaceous materials capable of bonding to a DNA strand. Such capture proteins are conventional and comprise a complementary sequence of nucleotides that bond to the DNA sequence of choice, the sequence having attached to it any appropriate means for bonding to the membrane. For example, such bonding means can be one of a pair of avidin and biotin, as is conventional. The

other of the pair is bonded to surface 302.

The method of use of cuvette 30g will be apparent from the preceding, and generally is as follows:

Chamber 32g contains in pre-prepared form most or all of the reagents needed for DNA amplification. The DNA-containing liquid is injected via pipette P, to only partially fill chamber 32g, and cap C is screwed into place or otherwise attached. Denaturing, incubating, and replicating proceed as in the other embodiments. Subsequently, pipette P is used again to inject into chamber 32g, the capture probes discussed above, and also detection probes. Such detection probes are also conventional, and comprise a protein and complementary nucleotides that attaches to the DNA strand of choice opposite to the end to which the capture probe attaches. The detection probe also includes any appropriate signal-generating moiety, for example, horseradish peroxidase, capable of reacting with a leuco dye to produce a detectable signal (e.g., a color change.) The technology for attaching two different probes at the opposite 3' and 5' end is known. For example in "Efficient Methods for Attachment of Thiol Specific Probes to the 3' End of Synthetic Oligodeoxyribonucleotides", Vol. 15 of *Nucleic Acids Research*, p. 5305 (1987), the techniques useful for the 3' end attachment are discussed. The articles discussing 5' end attachment are legion, for which the following is only representative: "Introduction of 5' Terminal Functional Groups. . . .", Vol. 164 of *Analytical Biochemistry*, p.336 (1987). It will be readily apparent that either the 3' or the 5' end is used to attach one of the two probes, and the other end is used to attach the other of the two probes.

Alternatively, the detection probe and the immobilizing probe can be one and the same, attached at, say, just the 5' end, using the techniques taught in the aforesaid *Analytical Biochemistry* article.

The cuvette, now containing both probes as well as the amplified DNA, is agitated or shaken, to promote mixing.

Thereafter, portion "X" of the cycle shown in Figure 1 is repeated in order to cause the two probes to attach to separate strands of DNA.

Following this step, the liquid, still in chamber 32g, is pushed up passageway 70g into chamber 160g. This pushing step is achieved by injecting via pipette P either additional liquid, or air, or by pulling a vacuum at vent opening 74g. If a liquid is used, a neutral solution (containing no active ingredients) is used. The liquid is allowed to incubate in chamber 160g, preferably by closing off vent opening 74g with cap C.

Thereafter, all the liquid is drawn off through membrane 300 into absorbing material 320. This is

done either by an additional pulse of air being injected, by assisting the natural flow of liquid through membrane 300 by applying a partial vacuum to opening 74g or by capillary attraction of absorbent material 320. At this point, the capture and detection probes have bonded, as a result of the replication part of portion X of the cycle, to the DNA strand, and the capture probe is captured by the surface 302 of the membrane. Any DNA strands lacking the capture probe pass through membrane 300 and are absorbed by material 320.

The final step is to inject into chambers 32g and 160g, a liquid containing a leuco dye or some other substance capable of reacting with the detection probe projecting from the DNA strands captured on surface 302. Useful leuco dyes include those set forth in U.S. Patent No. 4,089,747, preferably in combination with a solubilizing polymer such as poly(vinyl pyrrolidone). A preferred example of the dye is 2-(4-hydroxy-3,5-dimethoxyphenyl)-4,5-bis(4-methoxyphenyl)imidazole, since this gives about 1000 dye molecules per 1 molecule of horse radish peroxidase.

As an alternative to the above, capture probes bounded to beads, also conventional, can be used. The beads are selected with a diameter that is too large to pass through the pores of membrane 300.

Any suitable incubator is useful to cycle the cuvettes of this invention through the desired heating and cooling stages. Most preferably, the incubator provides stages that cycle through the temperatures shown in Figure 1. A convenient incubator 200 for doing this is one having the stations shown in Figure 19. A preincubate station 202 has heating means that establishes a temperature of approximately 95°C. From here, the cuvette is pushed by conventional pusher means onto a ring 210 of constant temperature stations, the first one 212 of which is maintained at 55°C. From this station the cuvette is shuttled to station 214, which heats it to 70°C. This temperature is maintained for a period, and accordingly station 216 is also at that temperature. Next, a short-time denaturing station 218 is encountered to denature the newly replicated DNA, which station is maintained at 95°C. Stations 220-234 simply repeat twice more the cycles already provided by stations 212-218. After station 234 is encountered, and if all amplification is complete, a conventional transfer mechanism (not shown) moves the cuvette off ring 210 for further processing. (Both the injection of liquid into the cuvette and the removal of liquid therefrom are done off-line, that is, outside of incubator 200.) If further amplification is needed, a particular cuvette continues around the incubator for additional cycles.

Claims

1. A thermal cycling cuvette (30; 30a; 30b; 30e; 30f; 30g) for controlled reaction of components of a liquid involving cycling through a temperature range of at least 35 °C, said cuvette (30; 30a; 30b; 30e; 30f; 30g) having at least one liquid-confining chamber (32; 32a; 32b; 32c; 32d; 32e; 32f; 32g) defined by two spaced-apart opposing walls (34, 36; 34a, 36a; 34b, 36b; 34e, 36e; 34f, 36f; 34g, 36g) each providing a major surface of contact, side walls (38, 40; 40a; 40b; 38e, 40e; 40f; 38g, 40g) connecting said two opposing walls (34, 36; 34a, 36a; 34b, 36b; 34e, 36e; 34f, 36f; 34g, 36g) with a spacing (t_1) between said opposing walls (34, 36; 34a, 36a; 34b, 36b; 34e, 36e; 34f, 36f; 34g, 36g) of no less than 0.5 mm, and means (60, 62, 64; 60a; 60b; 60c, 62c; 60d; 60e, 64e; 60f; 60g) permitting the introduction of liquid into, and the removal of such liquid from, said chamber (32; 32a; 32b; 32c; 32d; 32e; 32f; 32g);
characterised in that said opposing walls (34, 36; 34a, 36a; 34b, 36b; 34e, 36e; 34f, 36f; 34g, 36g) and said side walls (38, 40; 40a; 40b; 38e, 40e; 40f; 38g, 40g) are dimensioned to provide a predetermined surface-to-volume ratio of said chamber (32; 32a; 32b; 32c; 32d; 32e; 32f; 32g), at least one of said opposing walls (34; 34a; 34b; 34e; 34f; 34g) being provided with a predetermined thermal path length (t_2) and thermal resistance such that said ratio, path length and thermal resistance are effective to provide, for pure water contained within said chamber (32; 32a; 32b; 32c; 32d; 32e; 32f; 32g) in contact with said opposing walls (34, 36; 34a, 36a; 34b, 36b; 34e, 36e; 34f, 36f; 34g, 36g), a thermal time constant for such water that is no greater than 10 seconds, for a liquid volume of no more than 200 μ l.
2. A cuvette as defined in claim 1, wherein said predetermined surface-to-volume ratio is between 25.6 cm^{-1} (65 in^{-1}) and 51 cm^{-1} (130 in^{-1}) for a fill volume of between 100 and 200 μ l.
3. A cuvette as defined in claim 1 or 2, wherein said thermal path length (t_2) is no more than 0.3 mm and said thermal resistance is no more than 0.01 °C/watt.
4. A cuvette as defined in claim 2 or 3, wherein said opposing walls (34, 36; 34a, 36a; 34b, 36b; 34e, 36e; 34f, 36f; 34g, 36g) and said side walls (38, 40; 40a; 40b; 38e, 40e; 40f; 38g, 40g) are spaced so that water can be effectively withdrawn in no longer than 10 seconds with a capillary number of less than 0.05.
5. A cuvette as defined in claim 3, wherein said spacing (t_1) between said opposing walls (34, 36; 34a, 36a; 34b, 36b; 34e, 36e; 34f, 36f; 34g, 36g) is from 0.5 mm to 2.5 mm.
6. A cuvette as defined in any one of the preceding claims, wherein the structural component of at least one of said opposing walls (34; 34a; 34e; 34f; 34g) comprises aluminum no thicker than 0.15 mm.
7. A cuvette as defined in any one of the preceding claims, wherein at least one entire surface of one of said opposing walls (34; 34a; 34e; 34f; 34g) of said chamber (32; 32a; 32b; 32c; 32d; 32e; 32f; 32g) has a thermal resistance of no more than 0.01 °C/watt.
8. A cuvette as defined in any one of the preceding claims, and further including a reagent coated over at least one of said opposing walls (34, 36; 34a, 36a; 34b, 36b; 34e, 36e; 34f, 36f; 34g, 36g).
9. A cuvette as defined in claim 8, wherein said one opposing wall (36; 36a; 36b; 36e; 36f; 36g) is opposite to said opposing wall (34; 34a; 34b; 34e; 34f; 34g) having said thermal path length.
10. A cuvette as defined in any one of the preceding claims, wherein said permitting means (60, 62, 64; 60a; 60b; 60c, 62c; 60d; 60e, 64e; 60f; 60g) includes means defining a liquid access aperture (60; 60a; 60b; 60c; 60d; 60e; 60f; 60g).
11. A cuvette as defined in claim 10, and further including an opening (80; 80e; 80f; 80g) constructed to be larger than said liquid access aperture (60; 60a; 60b; 60c; 60d; 60e; 60f; 60g), to receive closure means (82) for sealing said larger opening (80; 80e; 80f; 80g), and wherein said aperture (60; 60a; 60b; 60c; 60d; 60e; 60f; 60g) is located within said larger opening (80; 80e; 80f; 80g).
12. A cuvette as defined in claim 11, and further including an air vent (70, 72, 74; 70a; 70b; 72c, 74c; 72d, 74d; 70e, 74e; 70f, 74f; 70g, 74g) for said chamber (32; 32a; 32b; 32c; 32d; 32e; 32f; 32g).
13. A cuvette as defined in claim 12, wherein said air vent (70, 72, 74; 70a; 70b; 72c, 74c; 72d, 74d; 70e, 74e; 70f, 74f; 70g, 74g) terminates at

a location within said larger opening (80; 80e; 80f; 80g).

14. A cuvette as defined in claim 10, wherein said liquid access aperture (60, 62, 64; 60a; 60b; 60c, 62c; 60d; 60e, 64e; 60f; 60g) is configured to removably mate with a pipette or pipette tip (P).

15. A cuvette as defined in any one of the preceding claims, wherein said permitting means (60c, 62c; 60d) includes a liquid access aperture (60c; 60d), an air vent (74c; 74d), and a movable valve (120, 122, 123, 124, 130, 132; 120d, 130d, 132d, 140d, 114d, 150) for selectively sealing off fluid flow between a) each of said access aperture (60c; 60d) and air vent (74c; 74d), and b) said chamber (32c; 32d).

16. A cuvette as defined in claim 15, wherein a portion (120) of said valve (120, 122, 123, 124, 130, 132) is rotatably mounted in the cuvette (30c), and further including means (126) for rotating said valve portion (120) about an axis (124), said access aperture (60c) and said air vent (74c) being rotationally oriented about said axis (124) to cooperate with rotation of said valve portion (120) to open and close said access aperture (60c) and said air vent (74c).

17. A cuvette as defined in claim 15, wherein said valve (120d, 130d, 132d, 140d, 114d, 150) is translatablely mounted within the cuvette (30d), and further including biasing means (150) for biasing said valve (120d, 130d, 132d, 140d, 114d, 150) to a closed position wherein said access aperture (60d) and said vent (74d) are fluidly disconnected from said chamber (32d).

18. A cuvette as defined in any one of the preceding claims, and further including a second liquid-confining chamber (160; 160f; 160g) defined by two spaced-apart opposing walls (36e, 164; 36f, 164f; 36g), side walls (166, 168; 166f, 168f; 166g, 168g) connecting said second chamber two opposing walls (36e, 164; 36f, 164f; 36g), means (70e; 170f; 170g) permitting the introduction of liquid into said second chamber (160; 160f; 160g) from said first chamber (32e; 32f; 32g), and means (74e; 74f; 74g) permitting the removal of such liquid out of said second chamber (32e; 32f; 32g); said chambers (32e, 160; 32f, 160f; 32g, 160g) further providing a major plane of liquid containment, the major plane of one of said chambers being disposed above the major plane of the other of said chambers.

19. A cuvette as defined in claim 18, wherein the length and/or width of said cuvette is reduced compared to a comparable cuvette in which said major planes are coplanar.

20. A cuvette as defined in claim 18 or 19, and further including a third liquid-confining chamber (310) fluidly connected to said second chamber (160g), and a liquid-permeable membrane (300, 302, 304) separating said third chamber (310) from said second chamber (160g).

21. A cuvette as defined in claim 20, and further including a liquid-absorbing material (320) in said third chamber (310).

22. A cuvette as defined in claim 20 or 21, and further including on said membrane (300, 302, 304), means for capturing a proteinaceous material capable of bonding to a DNA strand.

23. A cuvette as defined in claim 22, wherein said capturing means includes either avidin or biotin, said proteinaceous material having bonded thereto, the other of the avidin/biotin pair.

24. A cuvette as defined in any one of the preceding claims, wherein one of said walls is transparent and is recessed to protect it from scratches.

Patentansprüche

1. Thermoküvette (30; 30a; 30b; 30e; 30f; 30g) für die gesteuerte Reaktion von Bestandteilen einer Flüssigkeit, wobei die thermische Beeinflussung in einem Temperaturbereich von mindestens 35° C erfolgt und die Thermoküvette (30; 30a; 30b; 30e; 30f; 30g) mindestens eine die Flüssigkeit enthaltende Kammer (32; 32a; 32b; 32c; 32d; 32e; 32f; 32g) mit jeweils zwei einander gegenüberliegenden Wänden (34, 36; 34a, 36a; 34b, 36b; 34e, 36e; 34f, 36f; 34g, 36g) umfaßt, die jeweils eine größere Berührungsfläche bilden, Seitenwände (38, 40; 40a; 40b; 38e, 40e; 40f; 38g, 40g), die die einander gegenüberliegenden Wände (34, 36; 34a, 36a; 34b, 36b; 34e, 36e; 34f, 36f; 34g, 36g) mit einem Abstand (t₁) von höchstens 0,5 mm miteinander verbinden, und Mittel (60, 62, 64; 60a; 60b; 60c, 62c; 60d; 60e, 64e; 60f; 60g) zur Einführung von Flüssigkeit in die Kammer (32; 32a; 32b; 32c; 32d; 32e; 32f; 32g) und zur Entnahme von Flüssigkeit aus der Kammer, **dadurch gekennzeichnet**, daß die einander gegenüberliegenden Wände (34, 36; 34a, 36a; 34b, 36b; 34e, 36e; 34f, 36f; 34g, 36g) und die

- Seitenwände (38, 40; 40a; 40b; 38e, 40e; 40f; 38g, 40g) so bemessen sind, daß sie ein vorbestimmtes Oberflächen/Volumen-Verhältnis für die Kammer (32; 32a; 32b; 32c; 32d; 32e; 32f; 32g) bestimmen, daß mindestens eine der einander gegenüberliegenden Wände (34; 34a; 34b; 34e; 34f; 34g) eine vorbestimmte thermische Weglänge (t_2) und einen thermischen Widerstand aufweist, derart, daß das Oberflächen/Volumen-Verhältnis, die Weglänge und der thermische Widerstand für reines Wasser, das sich in der Kammer (32; 32a; 32b; 32c; 32d; 32e; 32f; 32g) in Berührung mit den einander gegenüberliegenden Wänden (34, 36; 34a, 36a; 34b, 36b; 34e, 36e; 34f, 36f; 34g, 36g) befindet, eine thermische Zeitkonstante liefern, die für ein Flüssigkeitsvolumen von höchstens 200 μl höchstens 10 sec beträgt.
2. Thermoküvette nach Anspruch 1, dadurch gekennzeichnet, daß das vorbestimmte Oberflächen/Volumen-Verhältnis für ein Füllvolumen von 100 bis 200 μl zwischen $25,6 \text{ cm}^{-1}$ (65 in^{-1}) und 51 cm^{-1} (130 in^{-1}) liegt.
 3. Thermoküvette nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die thermische Weglänge (t_2) höchstens 0,3 mm und der thermische Widerstand höchstens $0,01^\circ \text{ C/Watt}$ beträgt.
 4. Thermoküvette nach Anspruch 2 oder 3, dadurch gekennzeichnet, daß die einander gegenüberliegenden Wände (34, 36; 34a, 36a; 34b, 36b; 34e, 36e; 34f, 36f; 34g, 36g) und die Seitenwände (38, 40; 40a; 40b; 38e, 40e; 40f; 38g, 40g) in einem solchen Abstand voneinander angeordnet sind, daß Wasser in höchstens 10 sec mit einer Kapillarität von weniger als 0,05 wirksam entnehmbar ist.
 5. Thermoküvette nach Anspruch 3, dadurch gekennzeichnet, daß der Abstand (t_1) zwischen den einander gegenüberliegenden Wänden (34, 36; 34a, 36a; 34b, 36b; 34e, 36e; 34f, 36f; 34g, 36g) in einem Bereich zwischen 0,5 mm und 2,5 mm liegt.
 6. Thermoküvette nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß mindestens eine der einander gegenüberliegenden Wände (34; 34a; 34e; 34f; 34g) als baulichen Bestandteil Aluminium in einer Dicke von höchstens 0,15 mm enthält.
 7. Thermoküvette nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß mindestens eine ganze Fläche einer der einander gegenüberliegenden Wände (34; 34a; 34e; 34f; 34g) der Kammer (32; 32a; 32b; 32c; 32d; 32e; 32f; 32g) einen thermischen Widerstand von höchstens $0,01^\circ \text{ C/Watt}$ besitzt.
 8. Thermoküvette nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß mindestens eine der einander gegenüberliegenden Wände (34, 36; 34a, 36a; 34b, 36b; 34e, 36e; 34f, 36f; 34g, 36g) mit einem Reagens beschichtet ist.
 9. Thermoküvette nach Anspruch 8, dadurch gekennzeichnet, daß diese eine Wand (36; 36a; 36b; 36e; 36f; 36g) sich gegenüber der Wand (34; 34a; 34b; 34e; 34f; 34g) mit der thermischen Weglänge befindet.
 10. Thermoküvette nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß die Mittel (60, 62, 64; 60a; 60b; 60c, 62c; 60d; 60e, 64e; 60f; 60g) zur Einführung und Entnahme von Flüssigkeit eine Einrichtung umfassen, die eine Flüssigkeitseintrittsöffnung (60; 60a; 60b; 60c; 60d; 60e; 60f; 60g) bildet.
 11. Thermoküvette nach Anspruch 10, dadurch gekennzeichnet, daß eine Öffnung (80; 80e; 80f; 80g) vorgesehen ist, die größer ist als die Flüssigkeitseintrittsöffnung (60; 60a; 60b; 60c; 60d; 60e; 60f; 60g) und in der eine Schließvorrichtung (82) sitzt, die die größere Öffnung (80; 80e; 80f; 80g) abdichtet, und daß die Flüssigkeitseintrittsöffnung (60; 60a; 60b; 60c; 60d; 60e; 60f; 60g) sich innerhalb der größeren Öffnung (80; 80e; 80f; 80g) befindet.
 12. Thermoküvette nach Anspruch 11, dadurch gekennzeichnet, daß ein Luftkanal (70, 72, 74; 70a; 70b; 72c, 74c; 72d, 74d; 70e, 74e; 70f, 74f; 70g, 74g) für die Kammer (32; 32a; 32b; 32c; 32d; 32e; 32f; 32g) vorgesehen ist.
 13. Thermoküvette nach Anspruch 12, dadurch gekennzeichnet, daß der Luftkanal (70, 72, 74; 70a; 70b; 72c, 74c; 72d, 74d; 70e, 74e; 70f, 74f; 70g, 74g) an einem Punkt in die größere Öffnung (80; 80e; 80f; 80g) mündet.
 14. Thermoküvette nach Anspruch 10, dadurch gekennzeichnet, daß die Flüssigkeitseintrittsöffnung (60, 62, 64; 60a; 60b; 60c, 62c; 60d; 60e, 64e; 60f; 60g) so ausgebildet ist, daß eine Pipette oder Pipettenspitze (P) einführbar und entnehmbar ist.
 15. Thermoküvette nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß

die Mittel (60c, 62c; 60d) zur Einführung und Entnahme von Flüssigkeit eine Flüssigkeitseintrittsoffnung (60c; 60d), einen Luftkanal (74c; 74d) und ein bewegbares Ventil (120, 122, 123, 124, 130, 132; 120d, 130d, 132d, 140d, 114d, 150) umfassen, um einen Flüssigkeitsstrom wahlweise zwischen a) entweder der Flüssigkeitseintrittsoffnung (60c; 60d) oder dem Luftkanal (74c; 74d) und b) der Kammer (32c; 32d) auszuschließen.

16. Thermoküvette nach Anspruch 15, dadurch gekennzeichnet, daß ein Abschnitt (120) des Ventils (120, 122, 123, 124, 130, 132) in der Thermoküvette (30c) drehbar gelagert ist und daß eine Einrichtung (126) vorgesehen ist, mittels derer der Ventilabschnitt (120) um eine Achse (124) drehbar ist und daß die Flüssigkeitseintrittsoffnung (60c) und der Luftkanal (74c) drehbar um die Achse (124) ausgerichtet sind und mit dem Ventilabschnitt (120) bei seiner Drehung so zusammenwirken, daß die Flüssigkeitseintrittsoffnung (60c) und der Luftkanal (74c) geöffnet und geschlossen werden.

17. Thermoküvette nach Anspruch 15, dadurch gekennzeichnet, daß das Ventil (120d, 130d, 132d, 140d, 114d, 150) innerhalb der Thermoküvette (30d) translatorisch gelagert ist und daß eine Vorspanneinrichtung (150) das Ventil (120d, 130d, 132d, 140d, 114d, 150) in eine geschlossene Stellung vorspannt, in der die Flüssigkeitseintrittsoffnung (60d) und der Luftkanal (74d) mit der Kammer (32d) nicht mehr in einer Strömungsverbindung stehen.

18. Thermoküvette nach einem der vorhergehenden Ansprüche, gekennzeichnet durch eine zweite, Flüssigkeit enthaltende Kammer (160; 160f; 160g), die zwei einander gegenüberliegende Wände (36e, 164; 36f, 164f; 36g) sowie Seitenwände (166, 168; 166f, 168f; 166g, 168g) besitzt, die die beiden einander gegenüberliegenden Wände (36e, 164; 36f, 164f; 36g) der zweiten Kammer miteinander verbinden, Mittel (70e; 170f; 170g) zur Einführung von Flüssigkeit von der ersten Kammer (32e; 32f; 32g) in die zweite Kammer (160; 160f; 160g) und Mittel (74e; 74f; 74g) zur Entnahme der Flüssigkeit aus der zweiten Kammer (32e; 32f; 32g), wobei die Kammern (32e, 160; 32f, 160f; 32g, 160g) eine größere, die Flüssigkeit begrenzende Fläche bilden und die größere Fläche der jeweils einen Kammer über der größeren Fläche der jeweils anderen Kammer liegt.

19. Thermoküvette nach Anspruch 18, dadurch gekennzeichnet, daß dieselbe Küvette kürzer und schmaler ist als eine vergleichbare Küvette, bei der die größeren Flächen in einer Ebene liegen.

20. Thermoküvette nach Anspruch 18 oder 19, dadurch gekennzeichnet, daß eine dritte, Flüssigkeit enthaltende Kammer (310) vorgesehen ist, die mit der zweiten Kammer (160g) in Strömungsverbindung steht, und daß eine flüssigkeitsdurchlässige Membrane (300, 302, 304) die dritte Kammer (310) von der zweiten Kammer (160g) trennt.

21. Thermoküvette nach Anspruch 20, dadurch gekennzeichnet, daß in der dritten Kammer (310) ein flüssigkeitsabsorbierendes Material (320) vorgesehen ist.

22. Thermoküvette nach Anspruch 20 oder 21, dadurch gekennzeichnet, daß auf der Membrane (300, 302, 304) Mittel vorgesehen sind, die ein proteinhaltiges Material zurückhalten, das eine DNA-Faser binden kann.

23. Thermoküvette nach Anspruch 22, dadurch gekennzeichnet, daß diese Rückhaltemittel entweder Avidin oder Biotin enthalten und daß an dem proteinhaltigen Material jeweils entweder Avidin oder Biotin gebunden ist.

24. Thermoküvette nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß eine der Wände durchsichtig und zum Schutz vor Kratzern zurückversetzt ist.

Revendications

1. Cellule (30 ; 30a ; 30b ; 30e ; 30f ; 30g) pour cycles de traitement thermique, destinée à assurer la réaction contrôlée d'éléments constituants d'un liquide, par mise en oeuvre de cycles dans une plage de températures d'au moins 35 °C, la cellule (30 ; 30a ; 30b ; 30e ; 30f ; 30g) ayant au moins une chambre de retenue de liquide (32 ; 32a ; 32b ; 32c ; 32d ; 32e ; 32f ; 32g) délimitée par deux parois opposées distantes (34, 36 ; 34a, 36a ; 34b, 36b ; 34e, 36e ; 34f, 36f ; 34g, 36g) formant chacune une grande face de contact, des parois latérales (38, 40 ; 40a ; 40b ; 38e, 40e ; 40f ; 38g, 40g) raccordant les deux parois opposées (34, 36 ; 34a, 36a ; 34b, 36b ; 34e, 36e ; 34f, 36f ; 34g, 36g) avec un espacement (t_1) entre les parois opposées (34, 36 ; 34a, 36a ; 34b, 36b ; 34e, 36e ; 34f, 36f ; 34g, 36g) qui n'est pas inférieur à 0,5 mm, et un disposi-

lif (60, 62, 64 ; 60a ; 60b ; 60c, 62c ; 60d ; 60e, 64e ; 60f ; 60g) permettant l'introduction du liquide dans la chambre et son extraction de la chambre (32 ; 32a ; 32b ; 32c ; 32d ; 32e ; 32f ; 32g),

caractérisée en ce que les parois opposées (34, 36 ; 34a, 36a ; 34b, 36b ; 34e, 36e ; 34f, 36f ; 34g, 36g) et les parois latérales (38, 40 ; 40a ; 40b ; 38e, 40e ; 40f ; 38g, 40g) ont des dimensions destinées à donner un rapport surface-volume prédéterminé à la chambre (32 ; 32a ; 32b ; 32c ; 32d ; 32e ; 32f ; 32g), l'une au moins des parois opposées (34 ; 34a ; 34b ; 34e ; 34f ; 34g) ayant une longueur prédéterminée (t_2) de trajet thermique et une résistance thermique prédéterminée telles que le rapport, la longueur du trajet et la résistance thermique donnent, pour de l'eau pure contenue dans la chambre (32 ; 32a ; 32b ; 32c ; 32d ; 32e ; 32f ; 32g) au contact des parois opposées (34, 36 ; 34a, 36a ; 34b, 36b ; 34e, 36e ; 34f, 36f ; 34g, 36g), une constante de temps thermique pour l'eau qui ne dépasse pas 10 s, pour un volume de liquide qui ne dépasse pas 200 mm³(μ l).

2. Cellule selon la revendication 1, dans laquelle le rapport surface-volume prédéterminé est compris entre 25,6 et 51 cm⁻¹ (65 et 130 pouce⁻¹) pour un volume de remplissage compris entre 100 et 200 mm³ (μ l).

3. Cellule selon la revendication 1 ou 2, dans laquelle la longueur (t_2) du trajet thermique ne dépasse pas 0,3 mm et la résistance thermique ne dépasse pas 0,01 °C/W.

4. Cellule selon la revendication 2 ou 3, dans laquelle les parois opposées (34, 36 ; 34a, 36a ; 34b, 36b ; 34e, 36e ; 34f, 36f ; 34g, 36g) et les parois latérales (38, 40 ; 40a ; 40b ; 38e, 40e ; 40f ; 38g, 40g) ont un espacement tel que l'eau peut être efficacement retirée en un temps qui ne dépasse pas 10 s, avec un nombre capillaire inférieur à 0,05.

5. Cellule selon la revendication 3, dans laquelle l'espacement (t_1) des parois opposées (34, 36 ; 34a, 36a ; 34b, 36b ; 34e, 36e ; 34f, 36f ; 34g, 36g) est compris entre 0,5 et 2,5 mm.

6. Cellule selon l'une quelconque des revendications précédentes, dans laquelle l'élément de structure de l'une au moins des parois opposées (34 ; 34a ; 34e ; 34f ; 34g) est formé d'aluminium dont l'épaisseur ne dépasse pas 0,15 mm.

7. Cellule selon l'une quelconque des revendications précédentes, dans laquelle toute la surface au moins de l'une des parois opposées (34 ; 34a ; 34e ; 34f ; 34g) de la chambre (32 ; 32a ; 32b ; 32c ; 32d ; 32e ; 32f ; 32g) a une résistance thermique qui ne dépasse pas 0,01 °C/W.

8. Cellule selon l'une quelconque des revendications précédentes, comprend en outre un réactif revêtant l'une au moins des parois opposées (34, 36 ; 34a, 36a ; 34b, 36b ; 34e, 36e ; 34f, 36f ; 34g, 36g).

9. Cellule selon la revendication 8, dans laquelle ladite paroi opposée (36 ; 36a ; 36b ; 36e ; 36f ; 36g) est placée en face de la paroi opposée (34 ; 34a ; 34b ; 34e ; 34f ; 34g) qui a la longueur du trajet thermique.

10. Cellule selon l'une quelconque des revendications précédentes, dans laquelle le dispositif destiné à permettre l'introduction et l'extraction (60, 62, 64 ; 60a ; 60b ; 60c, 62c ; 60d ; 60e, 64e ; 60f ; 60g) comporte un dispositif délimitant une ouverture d'accès au liquide.

11. Cellule selon la revendication 10, comprenant en outre un orifice (80 ; 80e ; 80f ; 80g) ayant une construction telle qu'il est plus grand que l'ouverture d'accès au liquide (60 ; 60a ; 60b ; 60c ; 60d ; 60e ; 60f ; 60g) afin qu'il loge un dispositif (82) de fermeture étanche de cet orifice (80 ; 80e ; 80f ; 80g), et l'ouverture (60 ; 60a ; 60b ; 60c ; 60d ; 60e ; 60f ; 60g) est placée dans l'orifice plus grand (80 ; 80e ; 80f ; 80g).

12. Cellule selon la revendication 11, comprenant en outre un organe de ventilation d'air (70, 72, 74 ; 70a ; 70b ; 72c, 74c ; 72d, 74d ; 70e, 74e ; 70f, 74f ; 70g, 74g) pour la chambre (32 ; 32a ; 32b ; 32c ; 32d ; 32e ; 32f ; 32g).

13. Cellule selon la revendication 12, dans laquelle l'organe de ventilation (70, 72, 74 ; 70a ; 70b ; 72c, 74c ; 72d, 74d ; 70e, 74e ; 70f, 74f ; 70g, 74g) aboutit à un emplacement se trouvant dans l'orifice relativement grand (80 ; 80e ; 80f ; 80g).

14. Cellule selon la revendication 10, dans laquelle l'ouverture d'accès au liquide (60, 62, 64 ; 60a ; 60b ; 60c, 62c ; 60d ; 60e, 64e ; 60f ; 60g) a une configuration permettant sa coopération temporaire avec une pipette ou une pointe de pipette (P).

15. Cellule selon l'une quelconque des revendications précédentes, dans laquelle le dispositif destiné à permettre l'introduction et l'extraction (60c, 62c ; 60d) comprend une ouverture d'accès au liquide (60c ; 60d), un organe de ventilation (74c ; 74d), et un obturateur mobile (120, 122, 123, 124, 130, 132 ; 120d, 130d, 132d, 140d, 114d, 150) destiné à empêcher sélectivement de manière étanche la circulation du fluide entre a) chaque ouverture d'accès (60c ; 60d) et chaque organe de ventilation (74c ; 74d) et b) la chambre (32c ; 32d).
16. Cellule selon la revendication 15, dans laquelle une partie (120) de l'obturateur (120, 122, 123, 124, 130, 132) est montée afin qu'elle puisse tourner dans la cellule (30c), et comprenant en outre un dispositif (126) destiné à faire tourner la partie d'obturateur (120) autour d'un axe (124), l'ouverture d'accès (60c) et l'organe de ventilation (74c) étant orientés en rotation autour de l'axe (124) de manière qu'ils coopèrent avec la rotation de la partie d'obturateur (120) pour l'ouverture et la fermeture de l'ouverture d'accès (60c) et de l'organe de ventilation (74c).
17. Cellule selon la revendication 15, dans laquelle l'obturateur (120d, 130d, 132d, 140d, 114d, 150) est monté afin qu'il soit mobile en translation dans la cellule (30d), et comprenant en outre un dispositif (150) de rappel de l'obturateur (120d, 130d, 132d, 140d, 114d, 150) en position de fermeture dans laquelle l'ouverture d'accès (60d) et l'organe de ventilation (74d) sont déconnectés de la chambre (32d) et ne communiquent plus avec elle.
18. Cellule selon l'une quelconque des revendications précédentes, comprenant en outre une seconde chambre de retenue de liquide (160 ; 160f ; 160g) délimitée par deux parois opposées distantes (36e, 164 ; 36f, 164f ; 36g), des parois latérales (166, 168 ; 166f, 168f ; 166g, 168g) raccordant les deux parois opposées (36e, 164 ; 36f, 164f ; 36g) de la seconde chambre, un dispositif (70e ; 170f ; 170g) permettant l'introduction du liquide dans la seconde chambre (160 ; 160f ; 160g) à partir de la première chambre (32e ; 32f ; 32g) et un dispositif (74e ; 74f ; 74g) permettant l'extraction du liquide de la seconde chambre (32e ; 32f ; 32g), les chambres (32e ; 160 ; 32f, 160f ; 32g, 160g) formant en outre un plan principal de retenue du liquide, le plan principal de l'une des chambres étant placé au-dessus du plan principal de l'autre des chambres.
19. Cellule selon la revendication 18, dans laquelle la longueur et/ou la largeur de la cellule est réduite par rapport à une cellule comparable dans laquelle les plans principaux sont coplanaires.
20. Cellule selon la revendication 18 ou 19, comprenant en outre une troisième chambre (310) de retenue de liquide raccordée à la seconde chambre (160g) afin qu'elle communique avec elle et une membrane perméable au liquide (300, 302, 304) séparant la troisième chambre (310) de la seconde chambre (160g).
21. Cellule selon la revendication 20, comprenant en outre un matériau (320) d'absorption de liquide placé dans la troisième chambre (310).
22. Cellule selon la revendication 20 ou 21, comprenant en outre, sur la membrane (300, 302, 304), des moyens de capture d'une matière protéinacée capable de se lier à un brin d'ADN.
23. Cellule selon la revendication 22, dans laquelle les moyens de capture contiennent de l'avidine ou de la biotine, et la matière protéinacée qui s'y est liée porte de la biotine ou de l'avidine, respectivement.
24. Cellule selon l'une quelconque des revendications précédentes, dans laquelle l'une des parois est transparente et présente un évidement la protégeant contre les rayures.

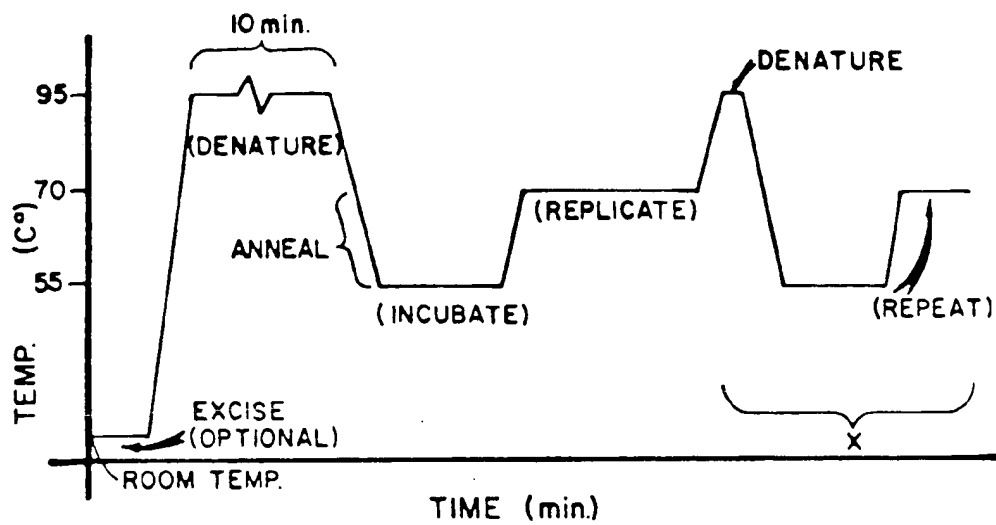


FIG. 1

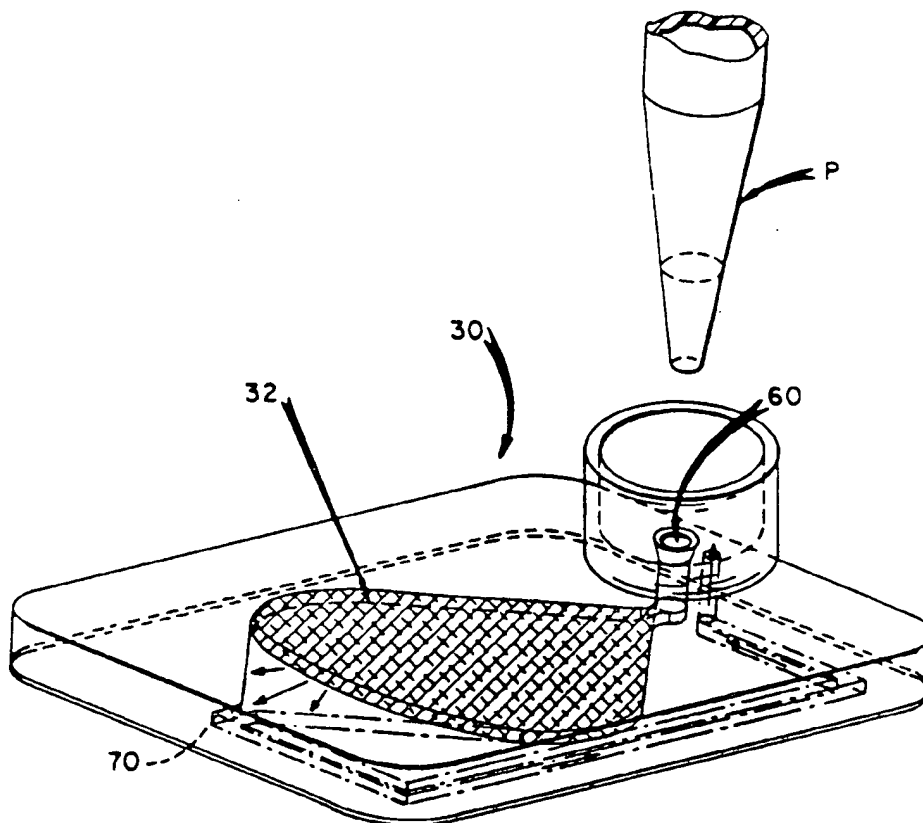


FIG. 2

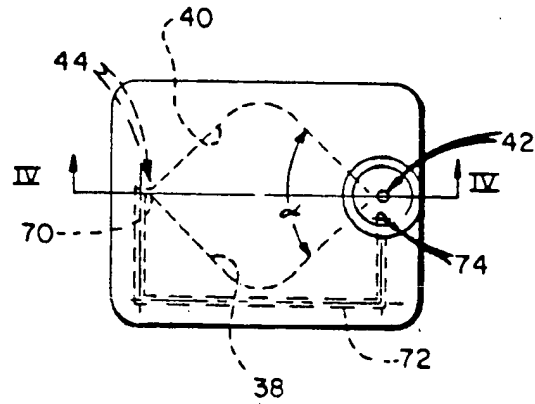


FIG. 3

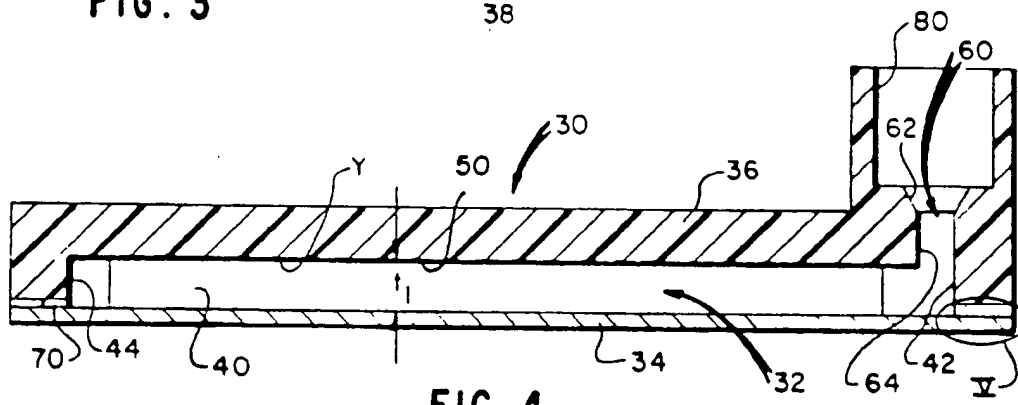


FIG. 4

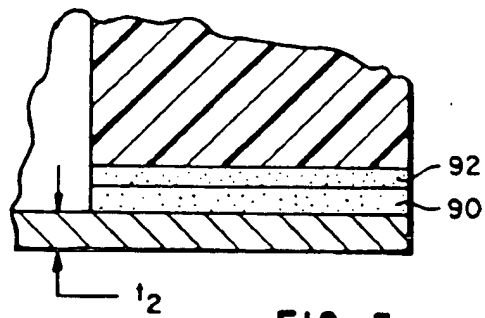


FIG. 5

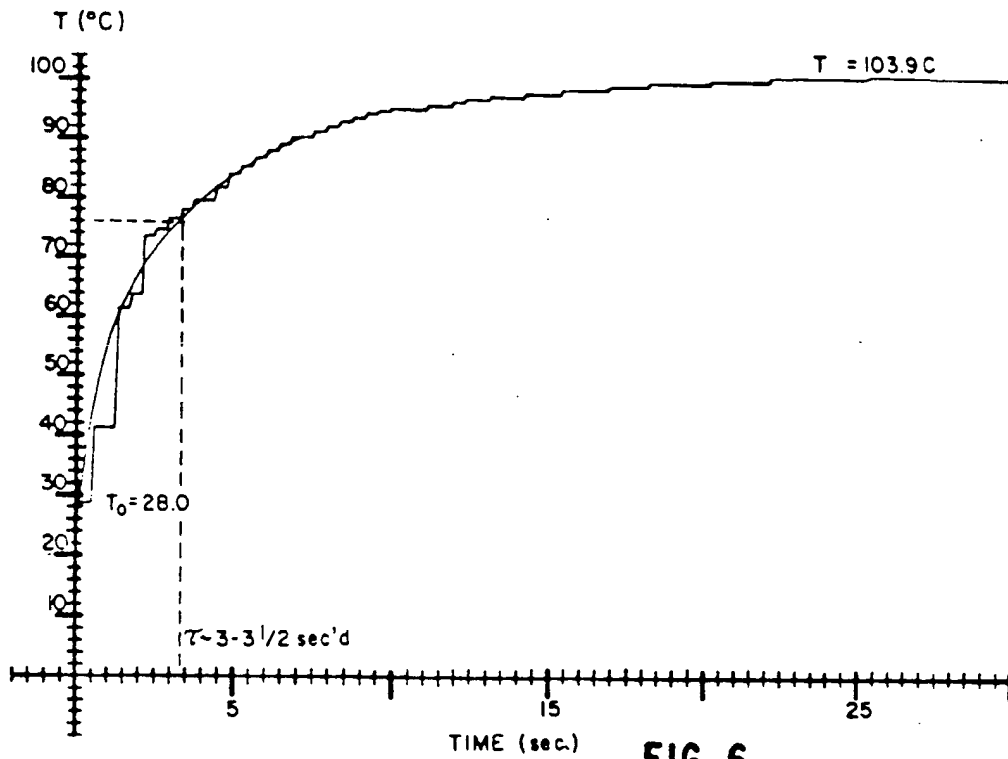


FIG. 6

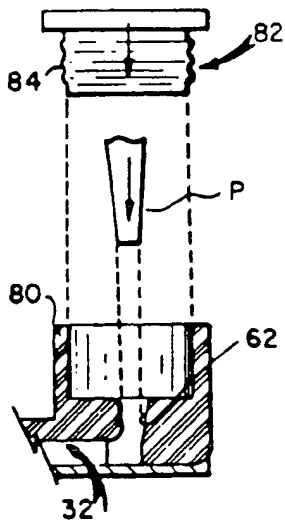


FIG. 10

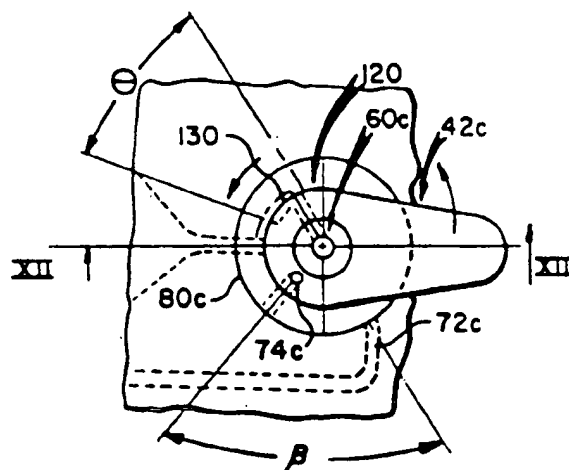


FIG. 11

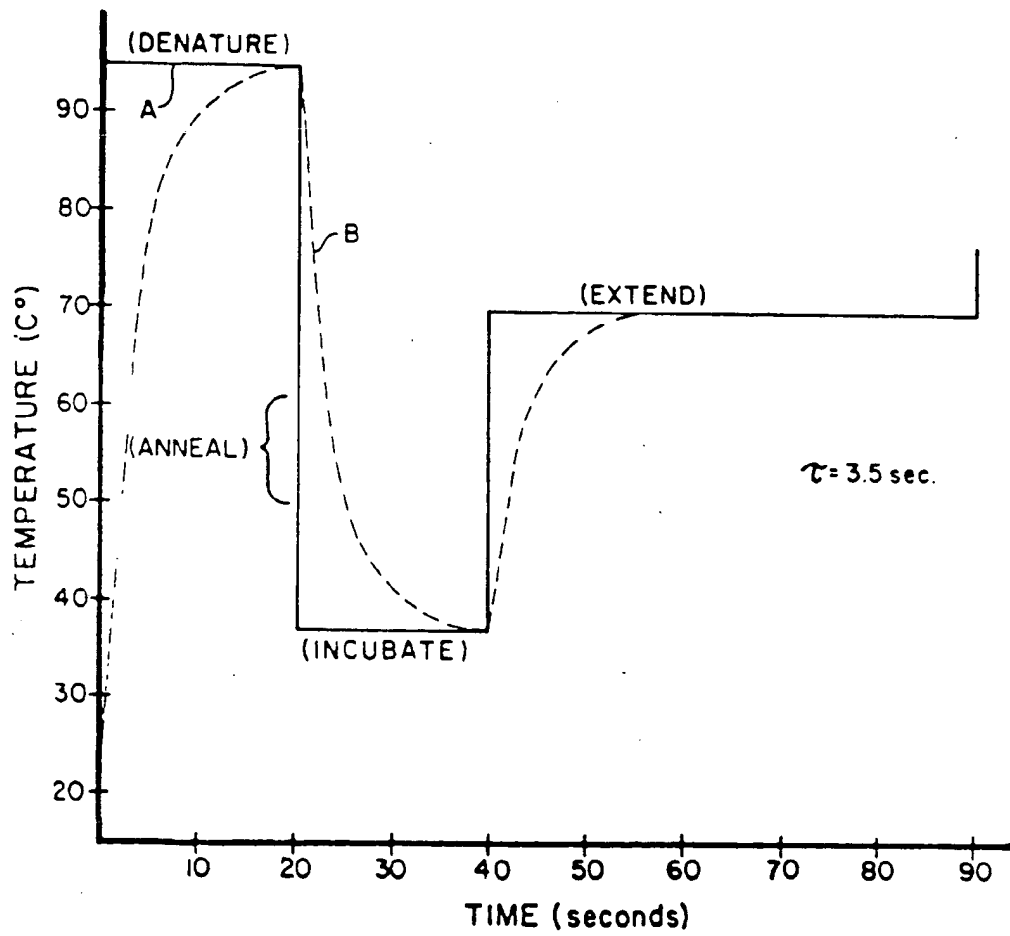


FIG. 7

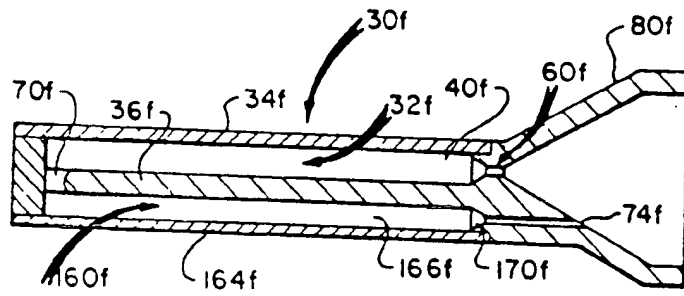


FIG. 18

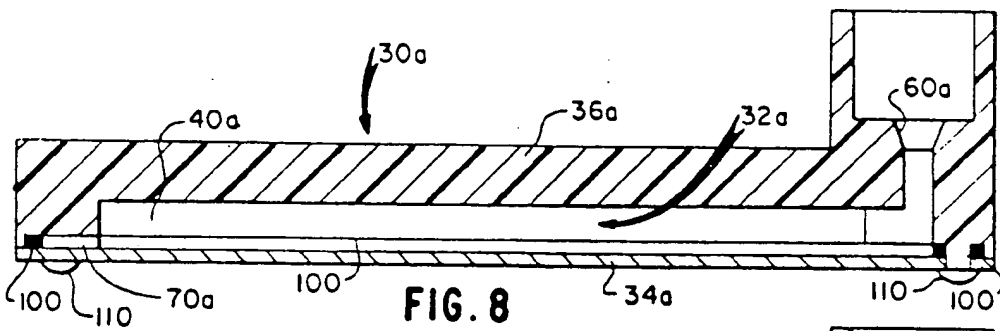


FIG. 8

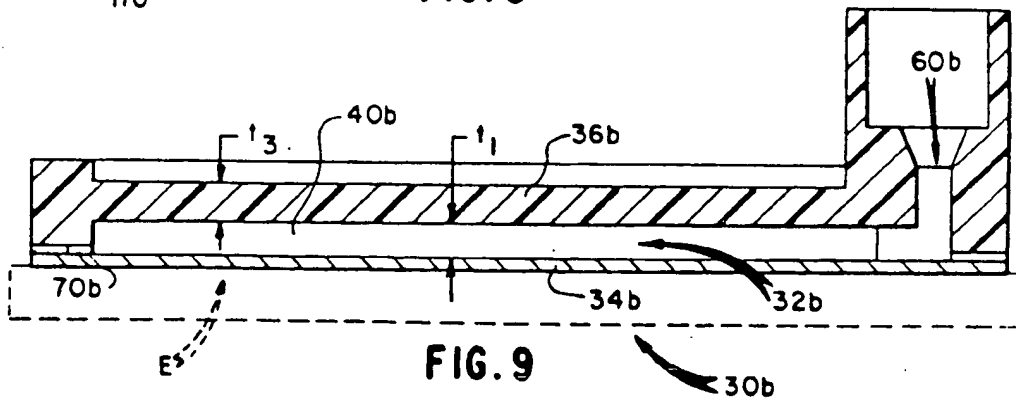


FIG. 9

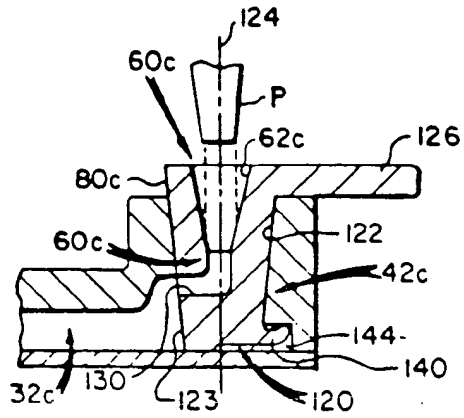


FIG. 12

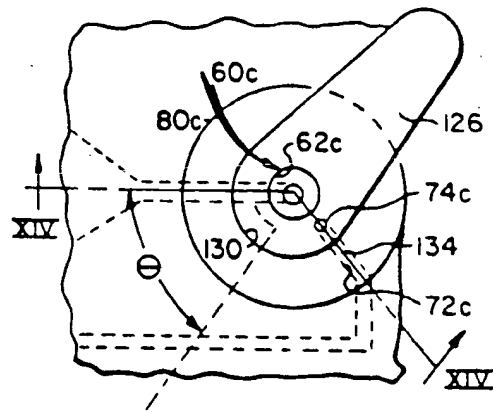


FIG. 13

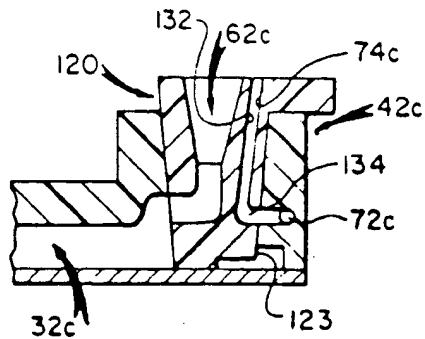


FIG. 14

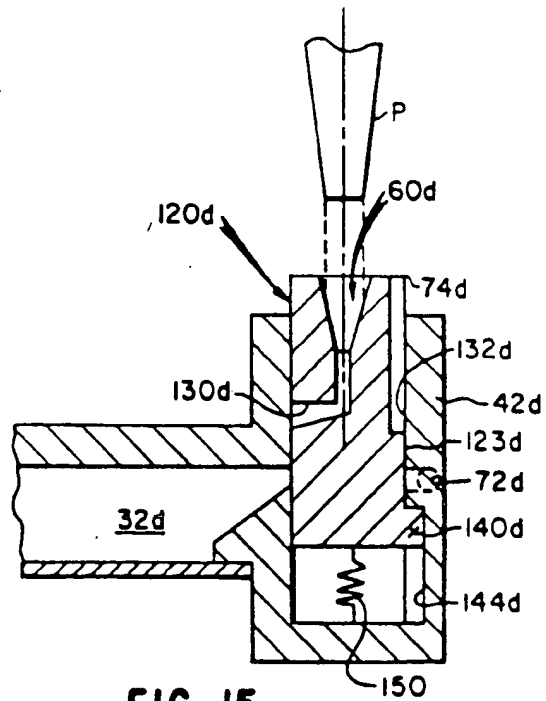


FIG. 15

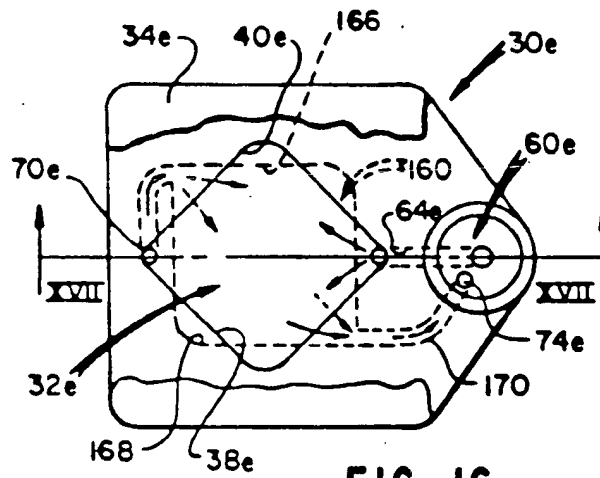


FIG. 16

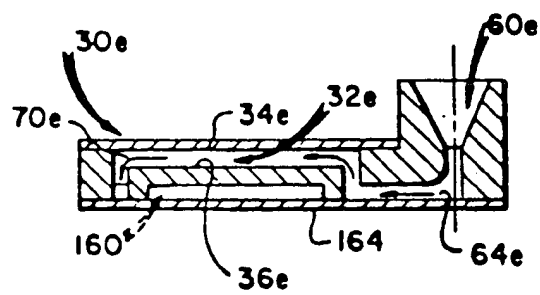


FIG. 17

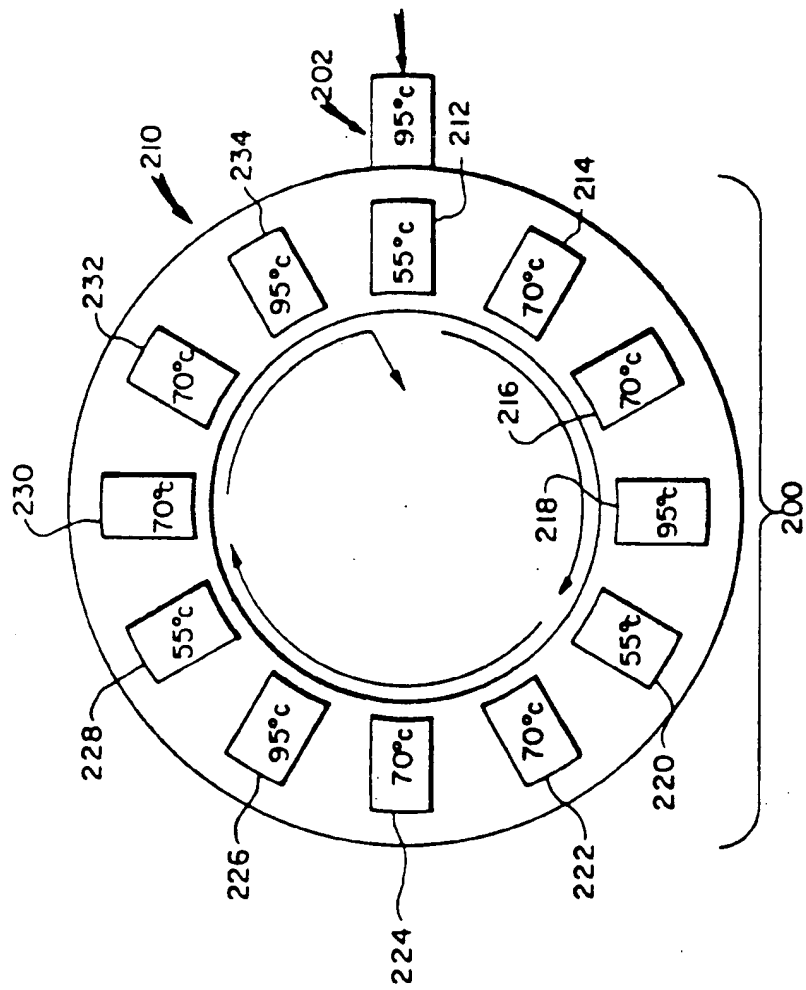


FIG. 19

